


Spring Spacer Installation Instructions for **SOME** XMR models and the Fox Podium Shocks

- Remove the shocks from the machine
- Compress the springs until the black retaining ring drops down a bit, there is a thin Cir-Clip that keeps the black retainer from coming off the end of the shocks, remove this Cir-Clip and then slide the retainer off the shock.



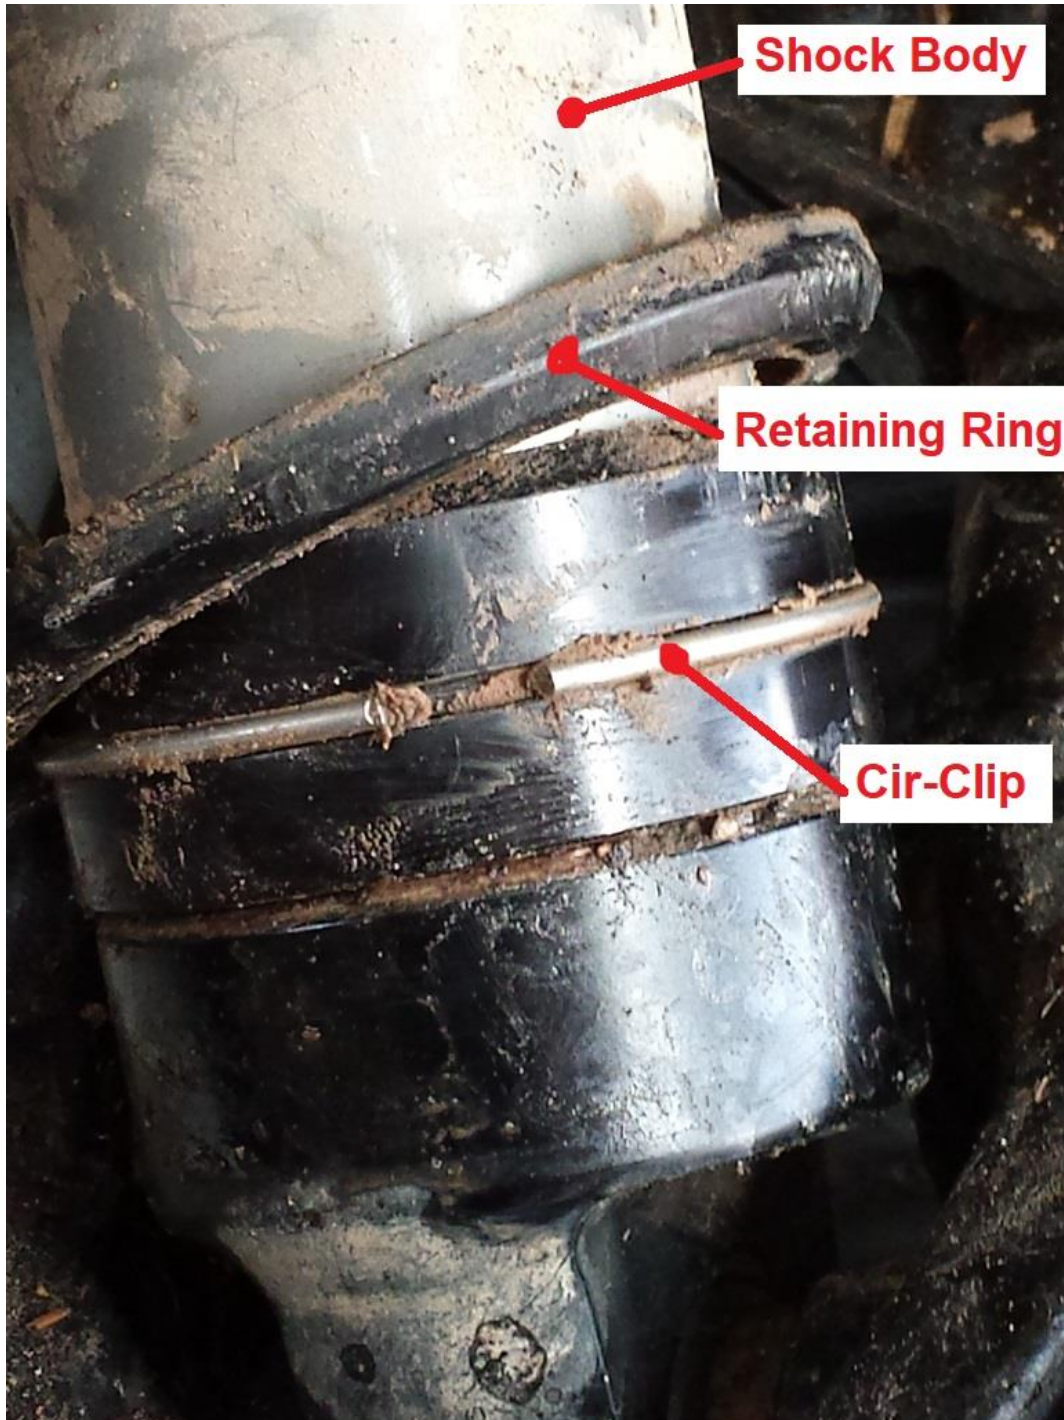

-Slide spring spacer into the shock, then slide the retainer back on, then put the Cir-Clip back in place.

Release the spring compressors and re-install the shocks on your machine.

NOTE: ON SOME SHOCKS THE SPACER GOES AGAINST THE SPRING RETAINER AND ON SOME SHOCKS THE SPRING GOES AGAINST THE THREADED ADJUSTOR, SEE PICTURES BELOW FOR REFERANCE!!!

Pictures for some of the various shocks on the different Machines





